



merlin *magic*



Base Station - Series magic


Instruction manual



The base station magic serves as interconnection between the hand helds and the cash register. It can communicate with up to 16 hand helds.

Fix the base station in a central position at a minimum height of 2.5m.
Avoid metallic surfaces in the surroundings.
Make sure that there is RF on all places of the serving area and beyond that.
(see also instruction manual of hand held)


Indication lights - connections

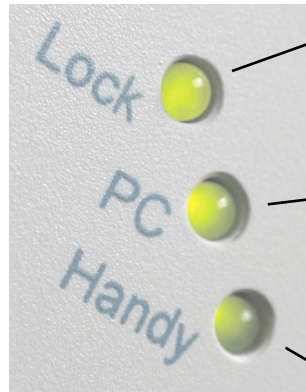

Log signal - indicates if there is communication to another RF module.

Indicates data transmission via serial interface.

Indicates data transmission to a hand held device.

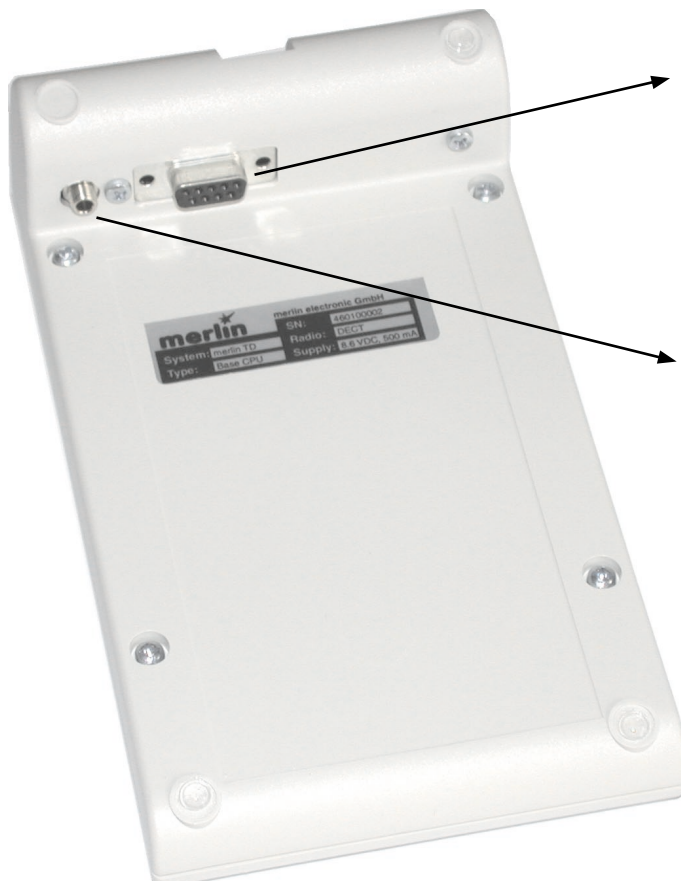

Serial interface - connection to the cash register. A standard 1:1 cable can be used.

Power supply 8,5 V DC, max. 500 mA.
Please use the power supply enclosed in the delivery only.

